

DARA



BODY

Electrostatic powder coated aluminium body.

LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

DRIVER

Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

LENS

Resistant to UV rays, 90% optically efficient PC material IP65 lens.

PCB


Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.
Copper Thickness: 1 OZ, HASL surface coating.

TECHNICAL SPECIFICATIONS

RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

ASYMMETRIC

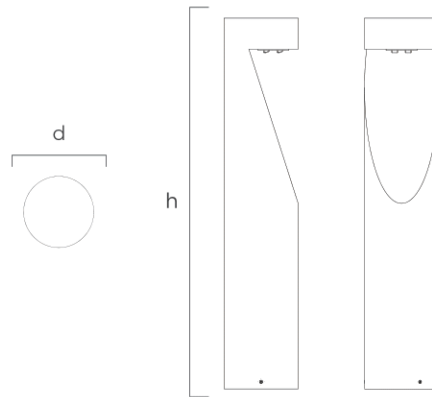

Product Code	Power	Lumen	Color Temperature	Dimensions d h	Weight	Carton Pieces
9000-390	15W	1800	3000-6500K	Ø125x400	2 kg	1
9000-391	15W	1800	3000-6500K	Ø125x600	2,5 kg	1
9000-392	15W	1800	3000-6500K	Ø125x800	3 kg	1