



## SMART I



### BODY

Electrostatic powder coated aluminium body.

### LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

### DRIVER

Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

### LENS

Resistant to UV rays, 90% optically efficient PMMA/ PC material IP65 lens.

### PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.  
Copper Thickness: 1 OZ,HASL surface coating.

### OPTIONS


Programmable driver.

## TECHNICAL SPECIFICATIONS

### RAL CODES

| Standard | Optional | Optional |
|----------|----------|----------|
| RAL 7016 | RAL 9016 | RAL 9022 |

### SYMMETRIC / ASYMMETRIC

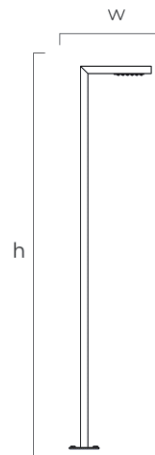

| Product Code | Power | Lumen | Color Temperature | Dimensions w h (mm) | Weight | Carton Pieces |
|--------------|-------|-------|-------------------|---------------------|--------|---------------|
| DTY.043      | 30W   | 3900  | 3000-6500K        | 600x3000            | 12 kg  | 1             |