



## VIA



### BODY

Electrostatic powder coated aluminium body, galvanised steel pole.

### LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

### DRIVER

Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

### LENS

Opal Diffuser.

### PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.  
Copper Thickness: 1 OZ, HASL surface coating.

### OPTIONS


Programmable driver.

## TECHNICAL SPECIFICATIONS

### RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

### SYMMETRIC

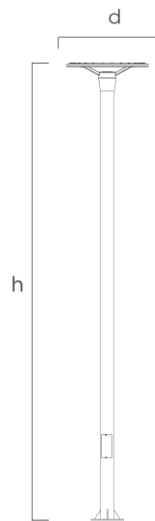

Product Code	Power	Lumen	Color Temperature	Dimensions d h (mm)	Weight	Carton Pieces
DTY.048	60W	6000	3000-6500K	Ø560x3200	20 kg	1
	60W	6000	3000-6500K	Ø560x4200	25 kg	1