

## WINNER



### BODY

Electrostatic powder coated aluminium body.

### LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

### DRIVER


Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

### LENS

IP65 glass lens.

### PCB

Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.  
Copper Thickness: 1 OZ, HASL surface coating.

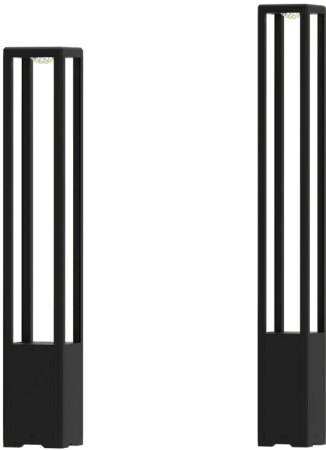


## TECHNICAL SPECIFICATIONS

### RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

### SYMMETRIC

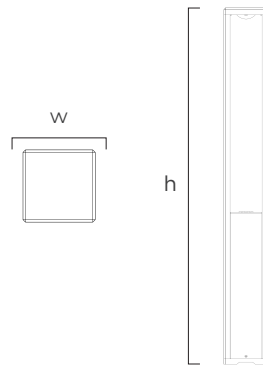

Product Code	Power	Lumen	Color Temperature	Dimensions d h	Weight	Carton Pieces
9000-339	15W	1800	3000-6500K	100x100x200	1,75 kg	1
9000-340	15W	1800	3000-6500K	100x100x400	2 kg	1
9000-342	15W	1800	3000-6500K	100x100x600	2,5 kg	1
9000-343	15W	1800	3000-6500K	100x100x800	3 kg	1
9000-344	15W	1800	3000-6500K	100x100x1000	3,25 kg	1