



## WONT III-IV



### BODY

Electrostatic powder coated aluminium body.

### LED

100.000 hours LED lifetime according to LM-80 and TM-21 report.

### DRIVER

Constant current output, With 90% efficiency, Effective power factor regulation that is not affected by fluctuations in grid voltage.

### LENS

Resistant to UV rays, 90% optically efficient PMMA/ PC material IP65 lens.

### PCB


Aluminum PCB, Aluminum Base Layer / Thickness: 1L / 1.6mm.  
Copper Thickness: 1 OZ, HASL surface coating.

## TECHNICAL SPECIFICATIONS

### RAL CODES

Standard	Optional	Optional
RAL 7016	RAL 9016	RAL 9022

### SYMMETRIC / ASYMMETRIC

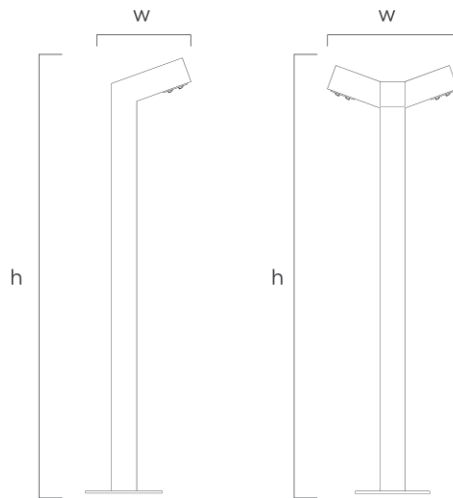

Product Code	Power	Lumen	Color Temperature	Dimensions d h	Weight	Carton Pieces
9000-315	15W	1800	3000-6500K	156x100x863	3 kg	1
9000-325	2*15W	3600	3000-6500K	263x100x863	4 kg	1